


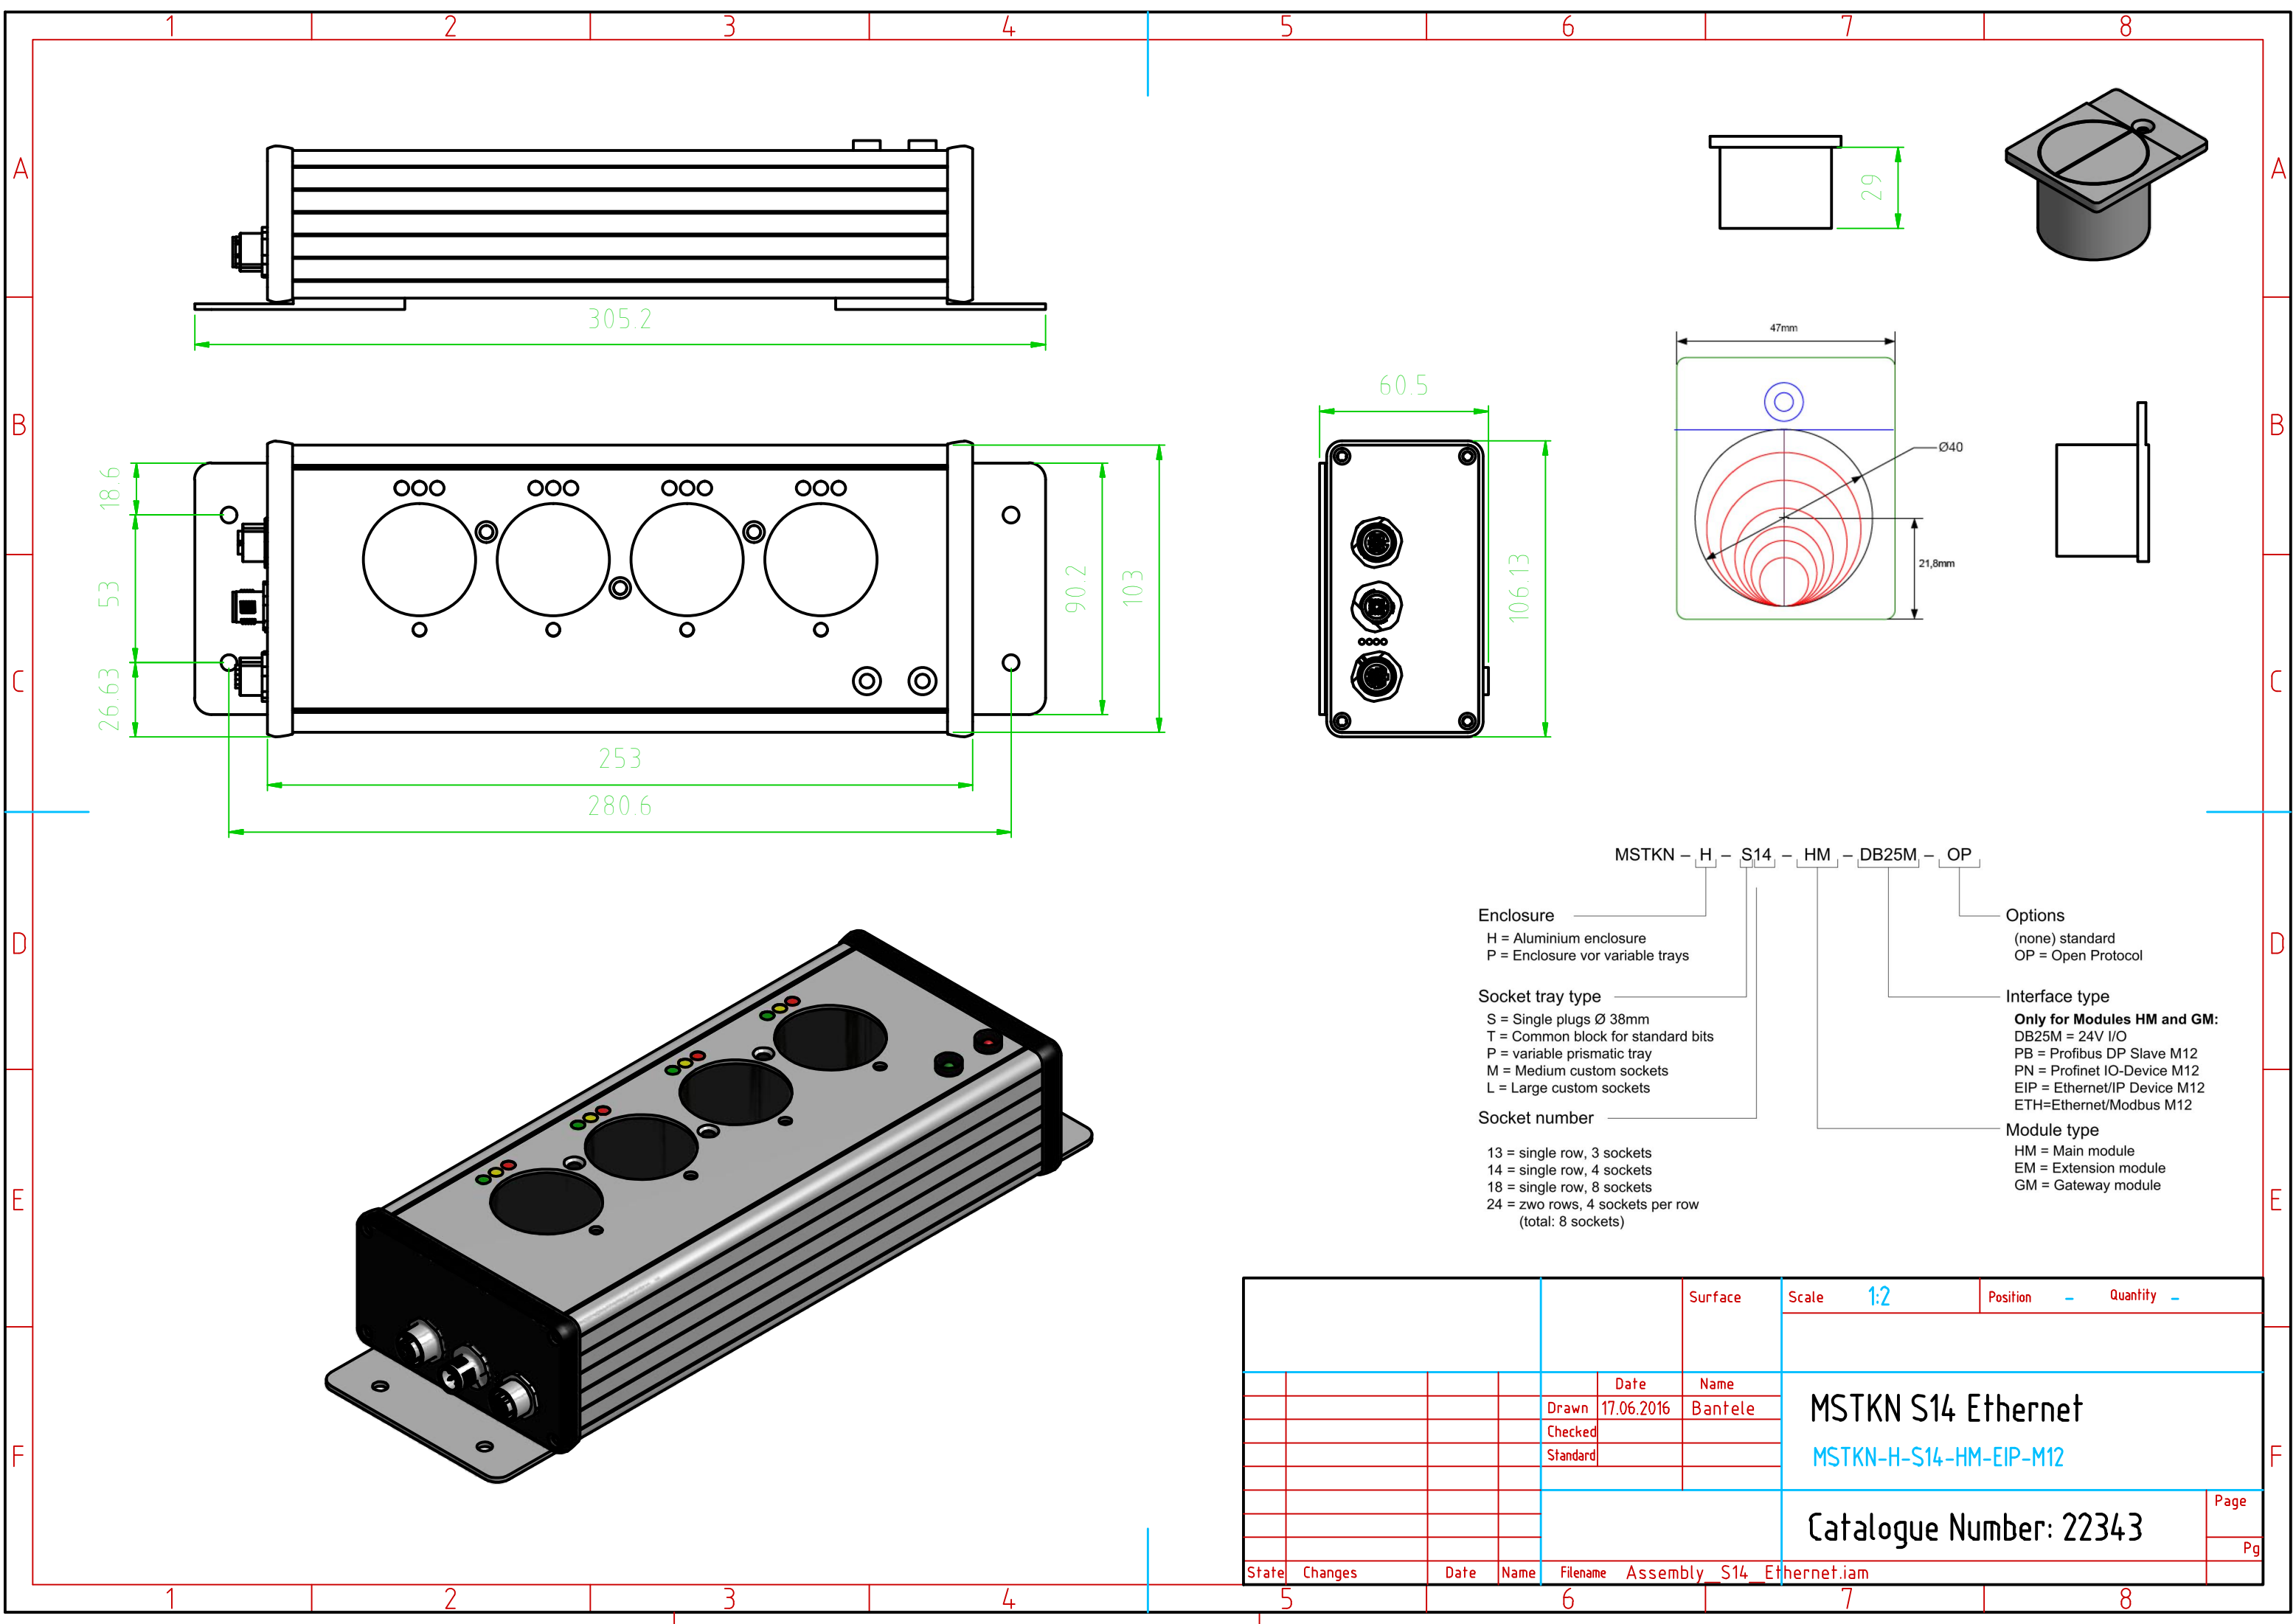

MSTKN - H - S14 - HM - DB25M - OP

Enclosure
H = Aluminium enclosure
P = Enclosure vor variable trays

Socket tray type
S = Single plugs Ø 38mm
T = Common block for standard bits
P = variable prismatic tray
M = Medium custom sockets
L = Large custom sockets

Socket number
13 = single row, 3 sockets
14 = single row, 4 sockets
18 = single row, 8 sockets
24 = zwo rows, 4 sockets per row
(total: 8 sockets)

Options
(none) standard
OP = Open Protocol

Interface type
Only for Modules HM and GM:
DB25M = 24V I/O
PB = Profibus DP Slave M12
PN = Profinet IO-Device M12
EIP = Ethernet/IP Device M12
ETH=Ethernet/Modbus M12

Module type
HM = Main module
EM = Extension module
GM = Gateway module

				Surface	Scale 1:2	Position -	Quantity -
				Date	Name	MSTKN S14 Ethernet MSTKN-H-S14-HM-EIP-M12	
				Drawn	17.06.2016		
				Checked	Bantele		
				Standard			
							Page
							Pg
State	Changes	Date	Name	Filename	Assembly_S14_Ethernet.iam	Catalogue Number: 22343	