
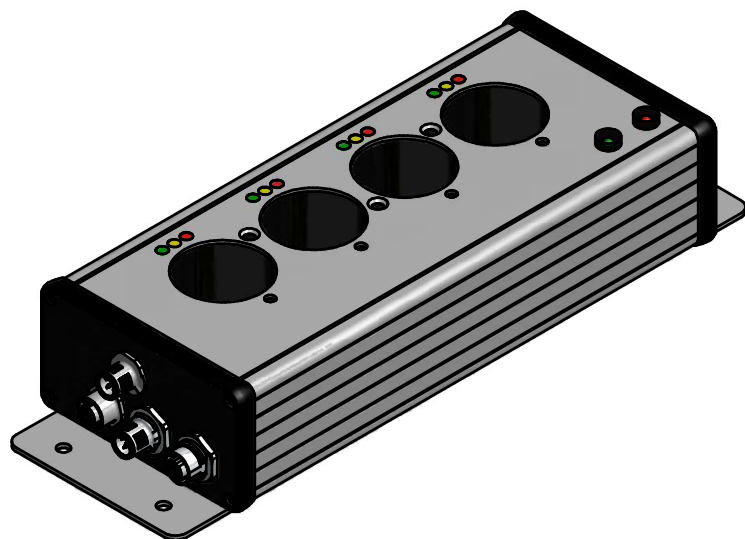




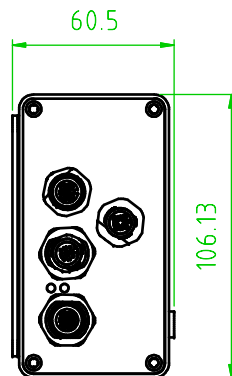
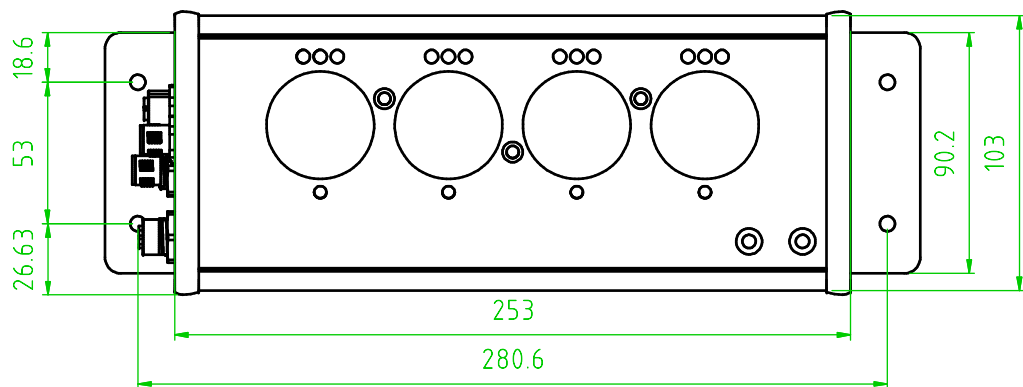


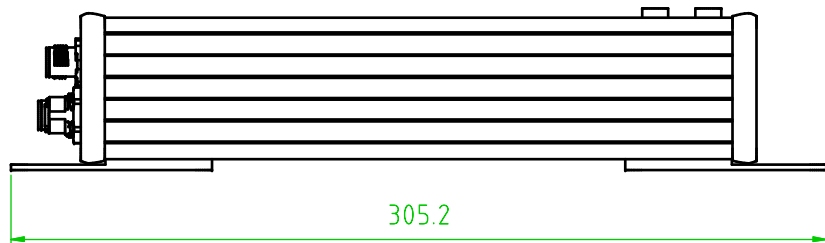

- MSTKN - H - S14 - HM - DB25M - OP
- Enclosure
H = Aluminium enclosure
P = Enclosure vor variable trays
- Socket tray type
S = Single plugs Ø 38mm
T = Common block for standard bits
P = variable prismatic tray
M = Medium custom sockets
L = Large custom sockets
- Socket number
13 = single row, 3 sockets
14 = single row, 4 sockets
18 = single row, 8 sockets
24 = two rows, 4 sockets per row
(total: 8 sockets)
- Options
(none) standard
OP = Open Protocol
- Interface type
Only for Modules HM and GM:
DB25M = 24V I/O
PB = Profibus DP Slave M12
PN = Profinet IO-Device M12
EIP = Ethernet/IP Device M12
ETH=Ethernet/Modbus M12
- Module type
HM = Main module
EM = Extension module
GM = Gateway module

				Surface	Scale	1:2	Position	Quantity
				Date	Name	MSTKN S14 Profibus MSTKN-H-S14-HM-PB-M12		
				Drawn	10.08.2015			
				Checked	Bantele			
				Standard				
							Catalogue Number: 22293	Page
								Pg
State	Changes	Date	Name	Filename	Assembly	S14_Profibus.iam		