
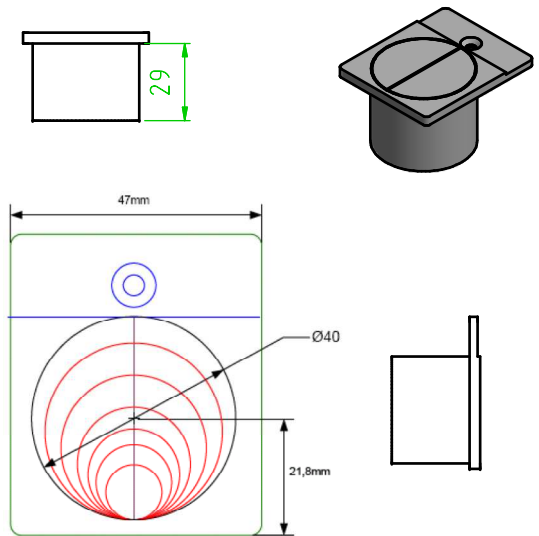


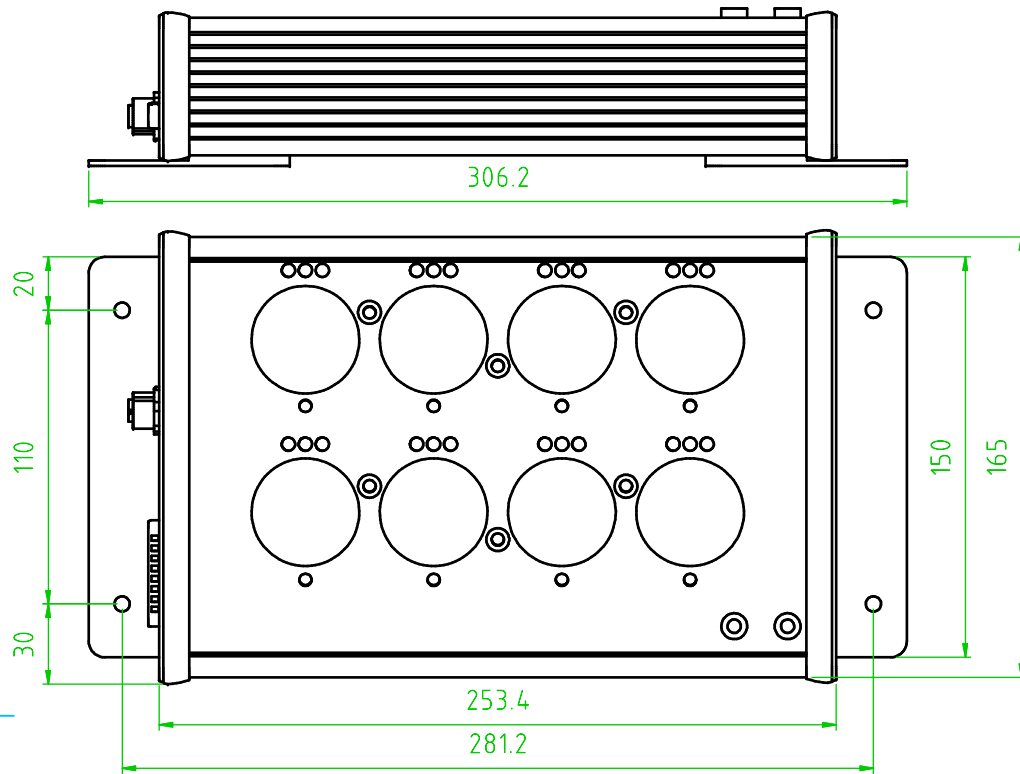

- MSTKN - H - S14 - HM - DB25M - OP
- Enclosure
H = Aluminium enclosure
P = Enclosure vor variable trays
- Socket tray type
S = Single plugs Ø 38mm
T = Common block for standard bits
P = variable prismatic tray
M = Medium custom sockets
L = Large custom sockets
- Socket number
13 = single row, 3 sockets
14 = single row, 4 sockets
18 = single row, 8 sockets
24 = two rows, 4 sockets per row
(total: 8 sockets)
- Options
(none) standard
OP = Open Protocol
- Interface type
Only for Modules HM and GM:
DB25M = 24V I/O
PB = Profibus DP Slave M12
PN = Profinet IO-Device M12
EIP = Ethernet/IP Device M12
ETH=Ethernet/Modbus M12
- Module type
HM = Main module
EM = Extension module
GM = Gateway module

						Surface	Scale		1:2	Position		Quantity	
					Date	Name		MSTKN S24 EA24 MSTKN-H-S24-HM-DB25M					
				Drawn	11.08.2015	Bantele							
				Checked									
				Standard									
							Catalogue Number: 3609409854						
State	Changes	Date	Name	Filename	Assembly S24 EA24.iam								Page
													Pg