


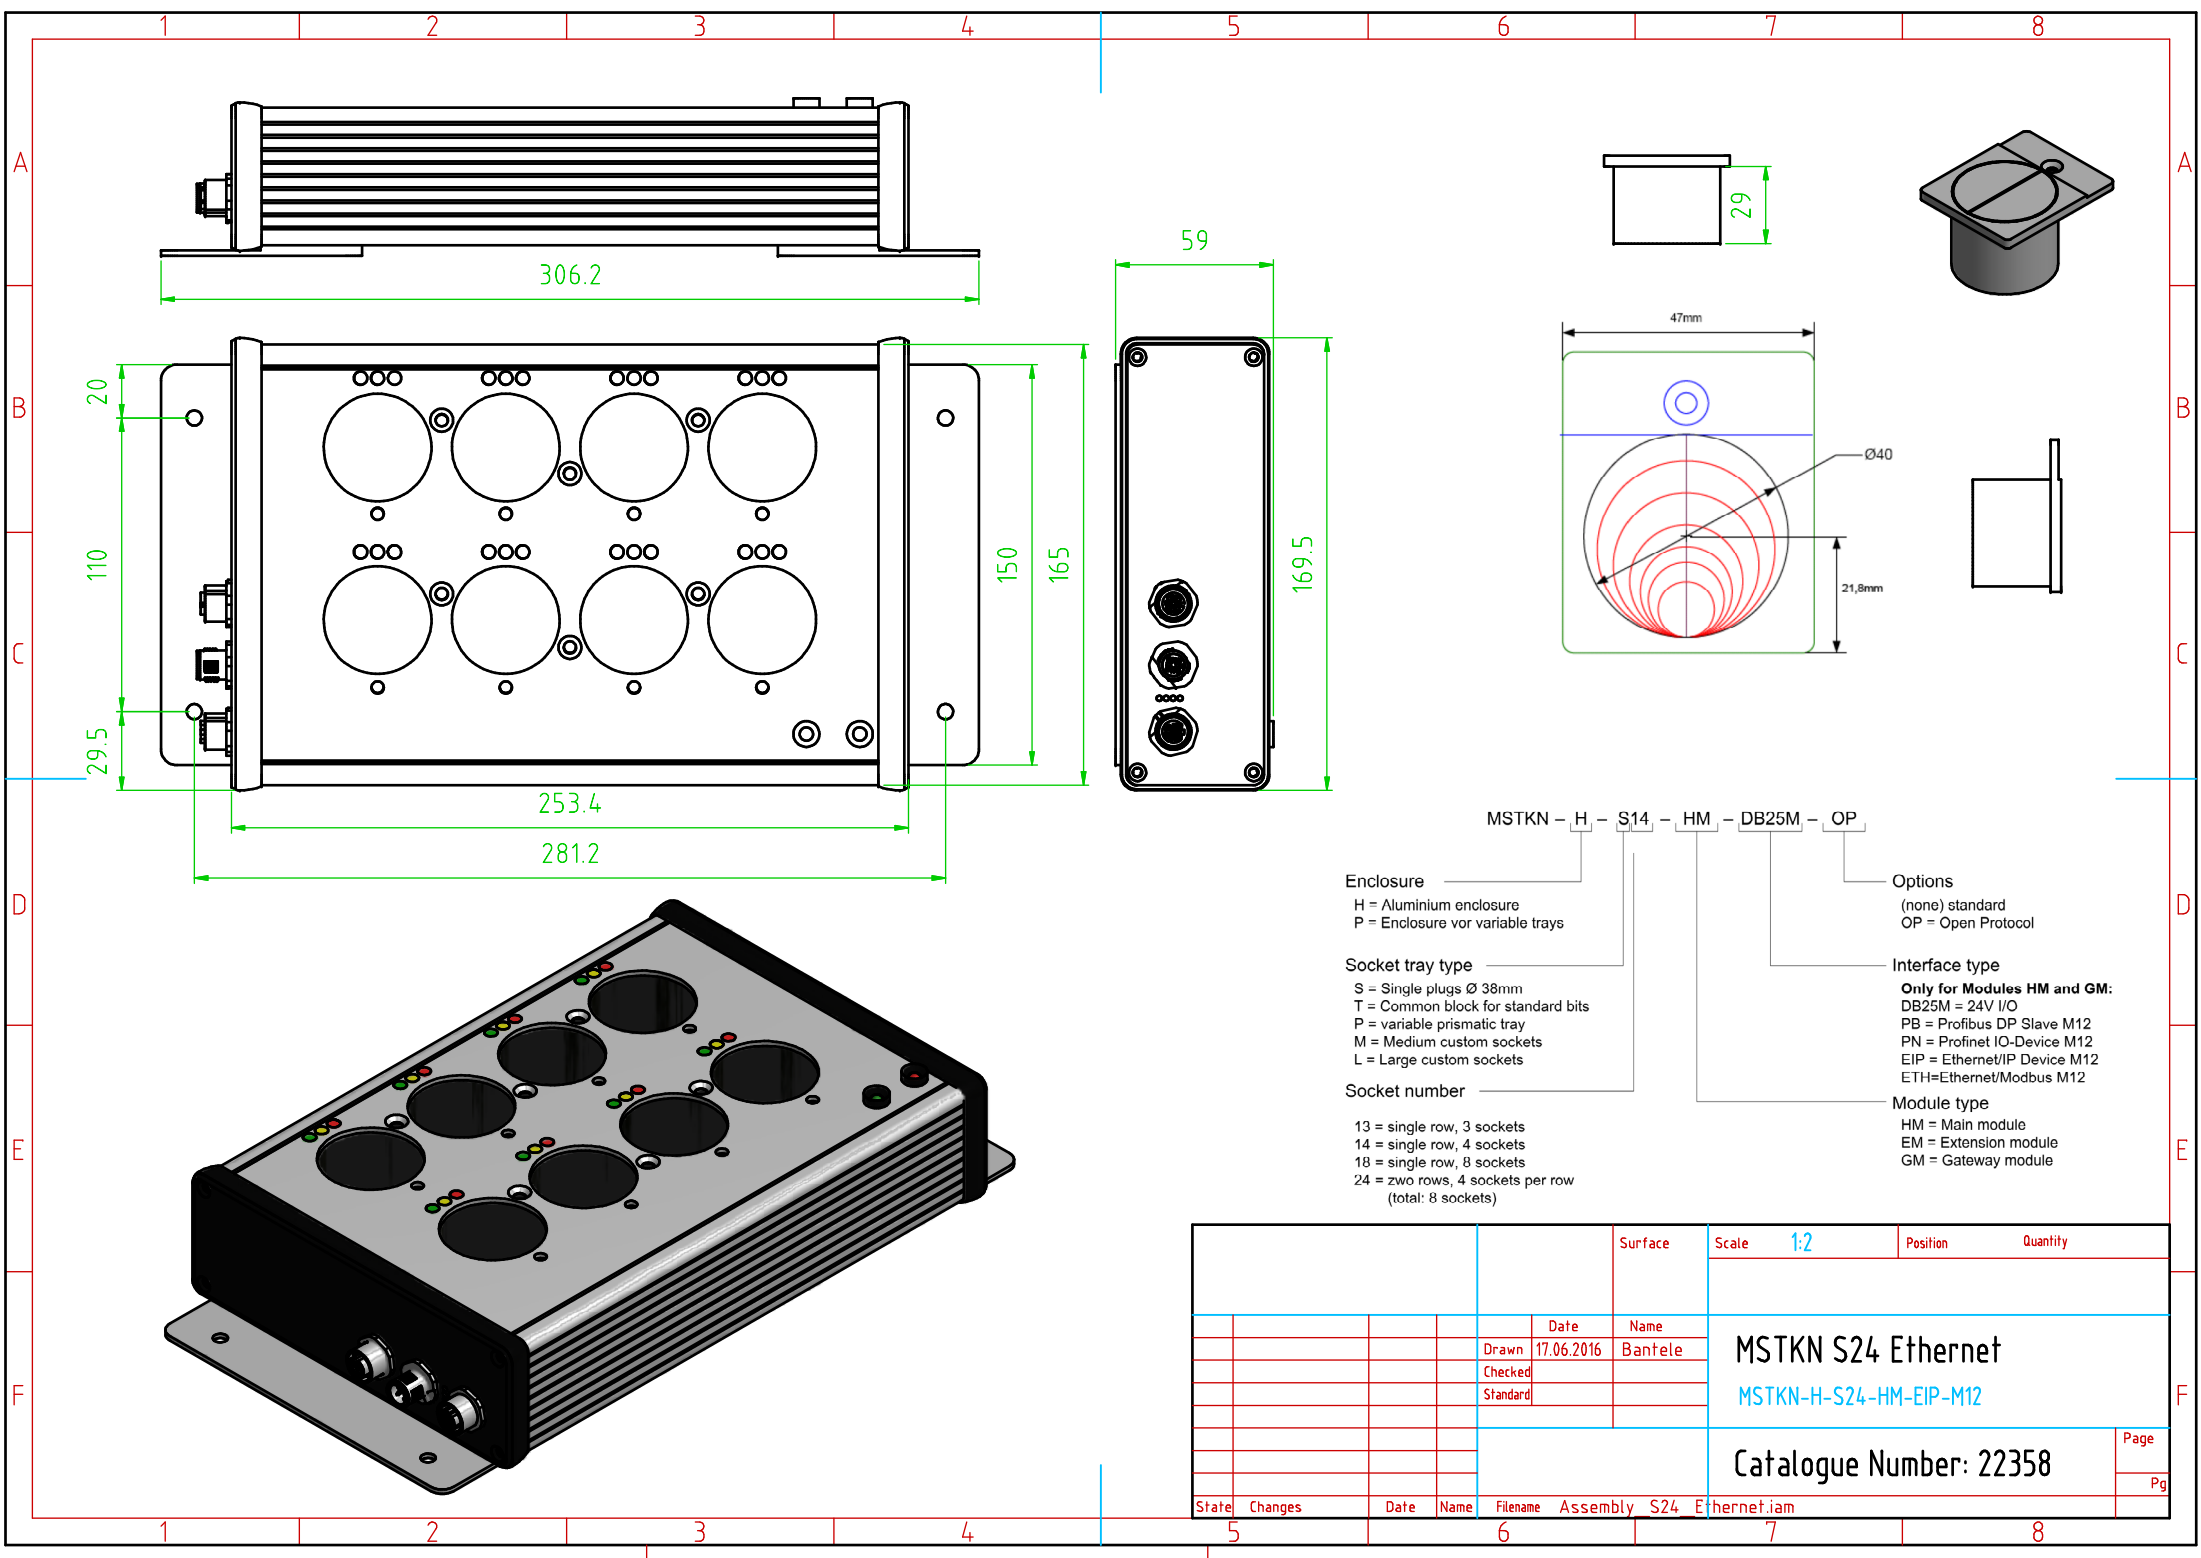

MSTKN - H - S14 - HM - DB25M - OP

Enclosure
H = Aluminium enclosure
P = Enclosure vor variable trays

Socket tray type
S = Single plugs Ø 38mm
T = Common block for standard bits
P = variable prismatic tray
M = Medium custom sockets
L = Large custom sockets

Socket number
13 = single row, 3 sockets
14 = single row, 4 sockets
18 = single row, 8 sockets
24 = two rows, 4 sockets per row
(total: 8 sockets)

Options
(none) standard
OP = Open Protocol

Interface type
Only for Modules HM and GM:
DB25M = 24V I/O
PB = Profibus DP Slave M12
PN = Profinet IO-Device M12
EIP = Ethernet/IP Device M12
ETH = Ethernet/Modbus M12

Module type
HM = Main module
EM = Extension module
GM = Gateway module

				Surface		Scale	1:2	Position	Quantity	
				Date	Name	MSTKN S24 Ethernet MSTKN-H-S24-HM-EIP-M12				
				Drawn	17.06.2016					Bantele
				Checked						
				Standard						
						Catalogue Number: 22358			Page	
State	Changes	Date	Name	Filename	Assembly	S24 Ethernet.iam			Pg	
5				6		7		8		