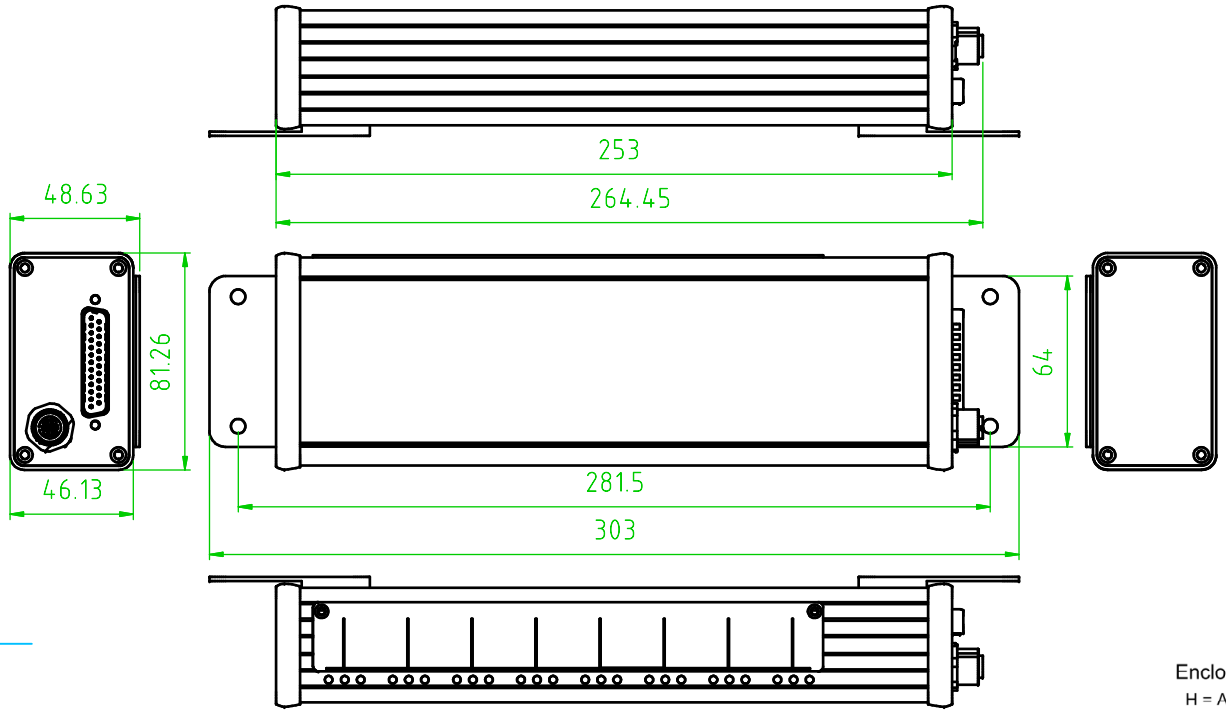

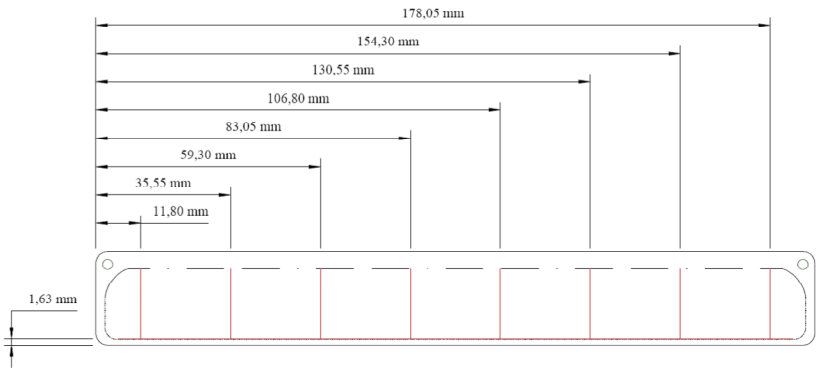

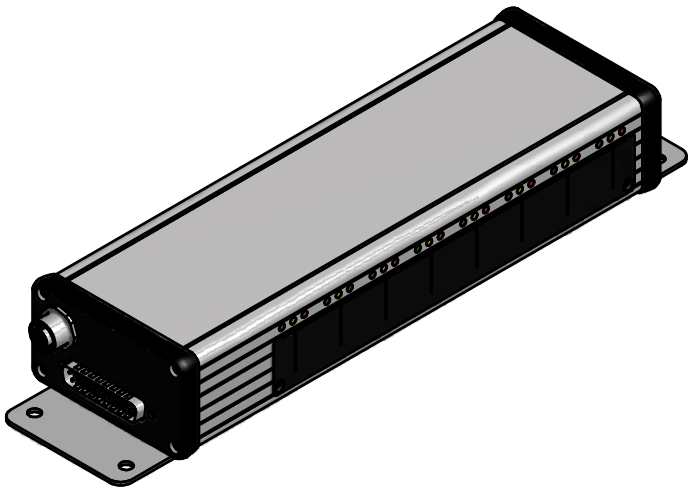

MSTKN – H – S14 – HM – DB25M – OP

Enclosure
- H = Aluminium enclosure
- P = Enclosure vor variable trays

Socket tray type
- S = Single plugs Ø 38mm
- T = Common block for standard bits
- P = variable prismatic tray
- M = Medium custom sockets
- L = Large custom sockets

Socket number
- 13 = single row, 3 sockets
- 14 = single row, 4 sockets
- 18 = single row, 8 sockets
- 24 = zwo rows, 4 sockets per row (total: 8 sockets)

Module type
- HM = Main module
- EM = Extension module
- GM = Gateway module

Interface type

Only for Modules HM and GM:
- DB25M = 24V I/O
- PB = Profibus DP Slave M12
- PN = Profinet IO-Device M12
- EIP = Ethernet/IP Device M12
- ETH=Ethernet/Modbus M12

Options
- (none) standard
- OP = Open Protocol

						Surface	Scale 1 : 2	Position / Quantity
					Date	Name		
				Drawn	19.08.2015	Bantele	MSTKN T18 EA24	
				Checked			MSTKN-H-T18-HM-DB25M	
				Standard				
							Catalogue Number: 22308	Page / Pg
State	Changes	Date	Name	Filename	Assembly_T18_EA24.iam			