

A

B

C

D

E

F

A



B

C

D

E

F

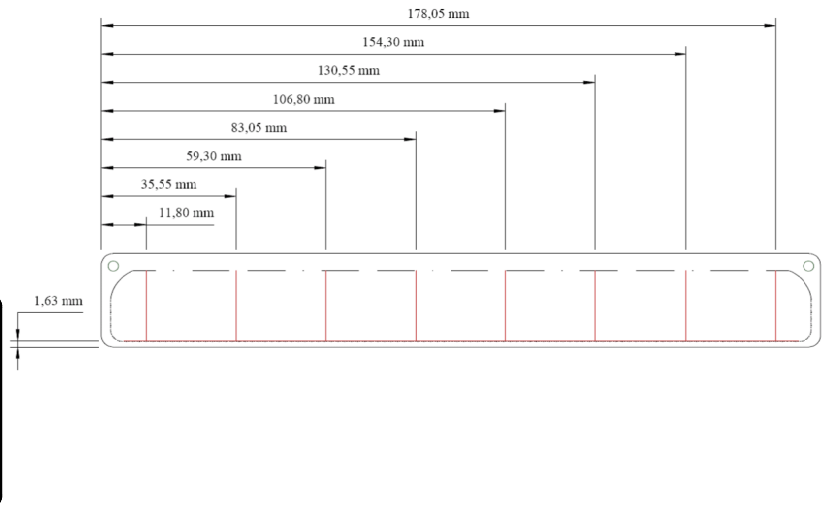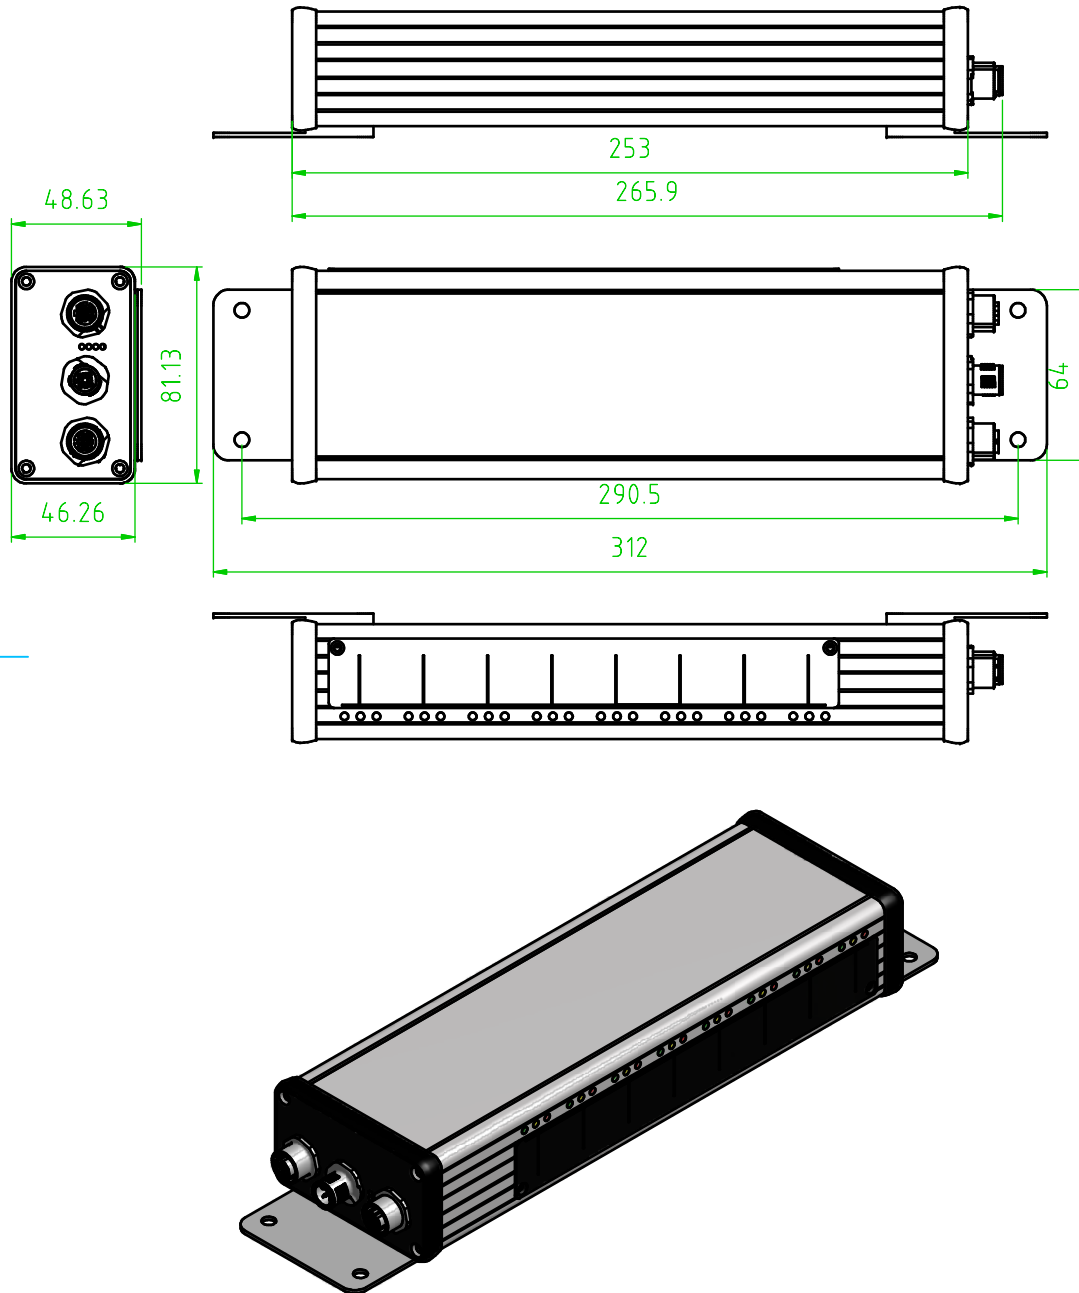

MSTKN - H - S14 - HM - DB25M - OP

Enclosure

H = Aluminium enclosure
P = Enclosure vor variable trays

Socket tray type

S = Single plugs Ø 38mm
T = Common block for standard bits
P = variable prismatic tray
M = Medium custom sockets
L = Large custom sockets

Socket number

13 = single row, 3 sockets
14 = single row, 4 sockets
18 = single row, 8 sockets
24 = two rows, 4 sockets per row
(total: 8 sockets)

Options

(none) standard
OP = Open Protocol

Interface type

Only for Modules HM and GM:
DB25M = 24V I/O
PB = Profibus DP Slave M12
PN = Profinet IO-Device M12
EIP = Ethernet/IP Device M12
ETH = Ethernet/Modbus M12

Module type

HM = Main module
EM = Extension module
GM = Gateway module

				Surface	Scale	1:2	Position	Quantity
				Date	Name	MSTKN T18 Ethernet MSTKN-H-T18-HM-EIP-M12		
				Drawn	19.08.2015			
				Checked	Bantele			
				Standard				
								Page
								Pg
State	Changes	Date	Name	Filename	Assembly	T18 Ethernet.iam	Catalogue Number: 22338	